




Uniden D1688 Base Replacement

Detailed summary of how to disassemble the base of the Uniden D1688.

Written By: justin

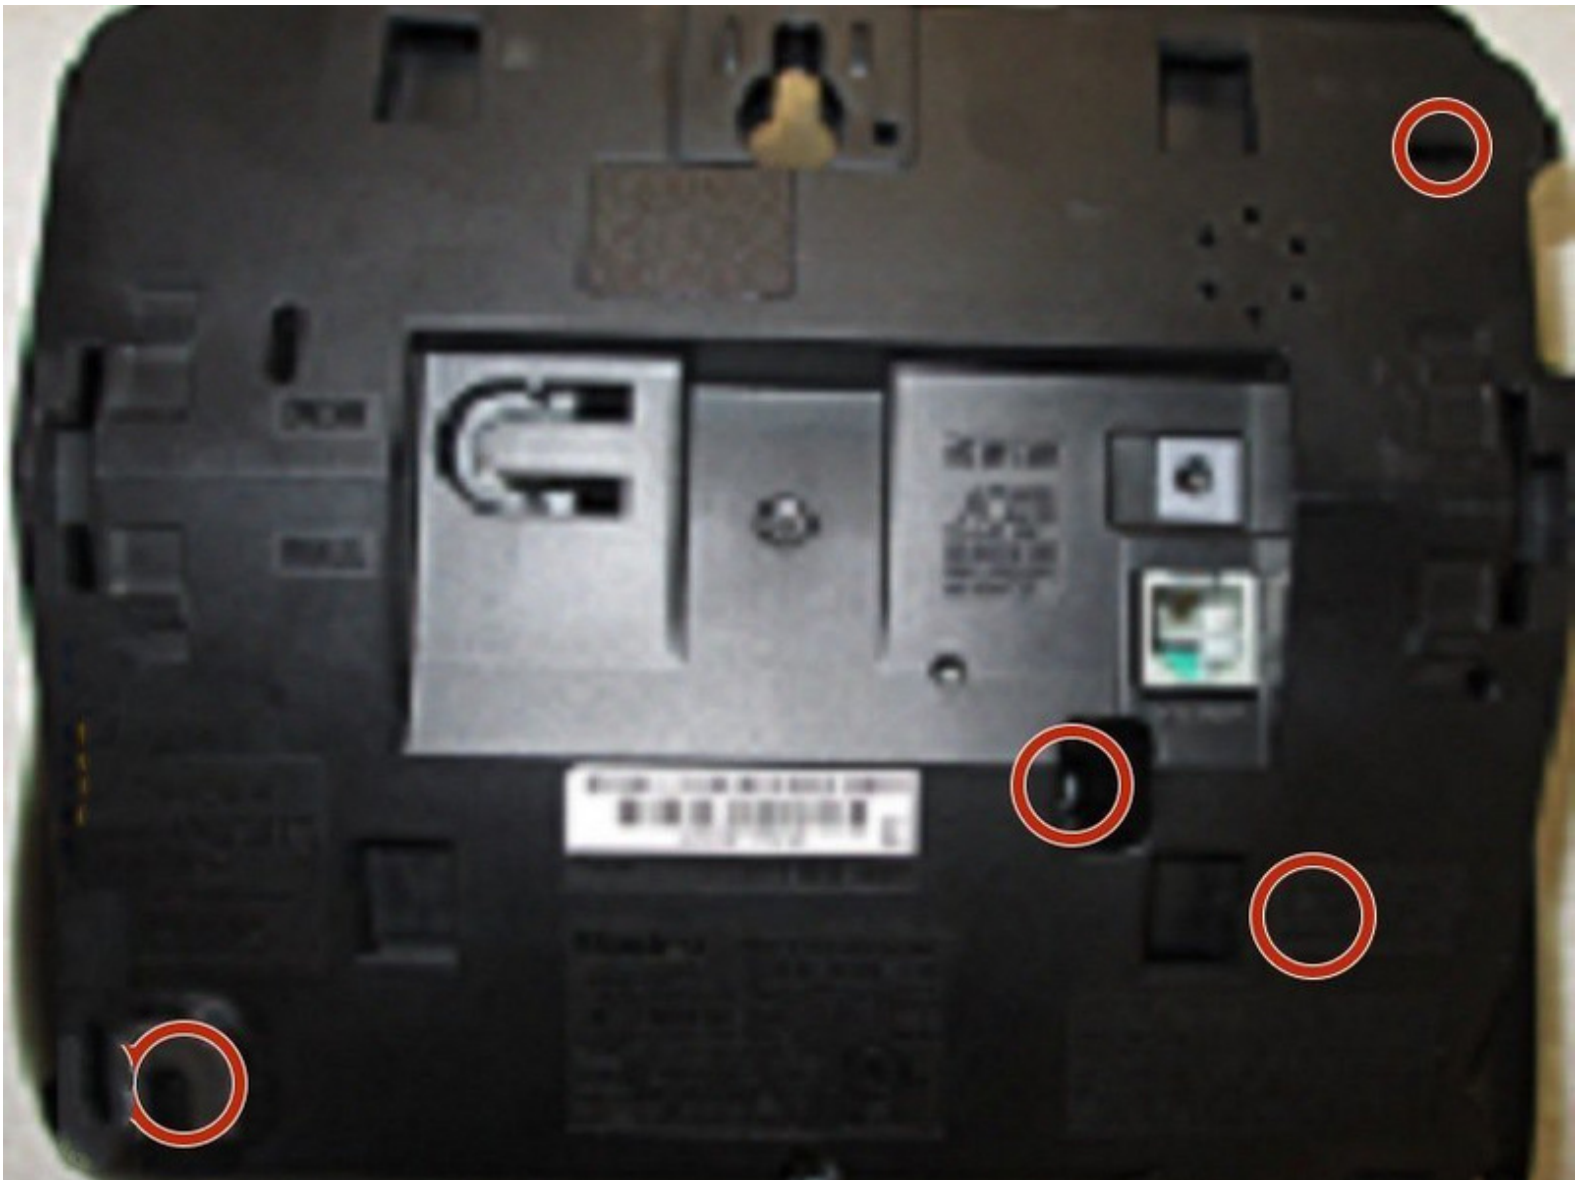

INTRODUCTION


In this guide, you will learn how to disassemble the the base of Uniden D1688. You will learn how to use the spudger to open the case.



TOOLS:


- [Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Uniden D1688 Base Replacement

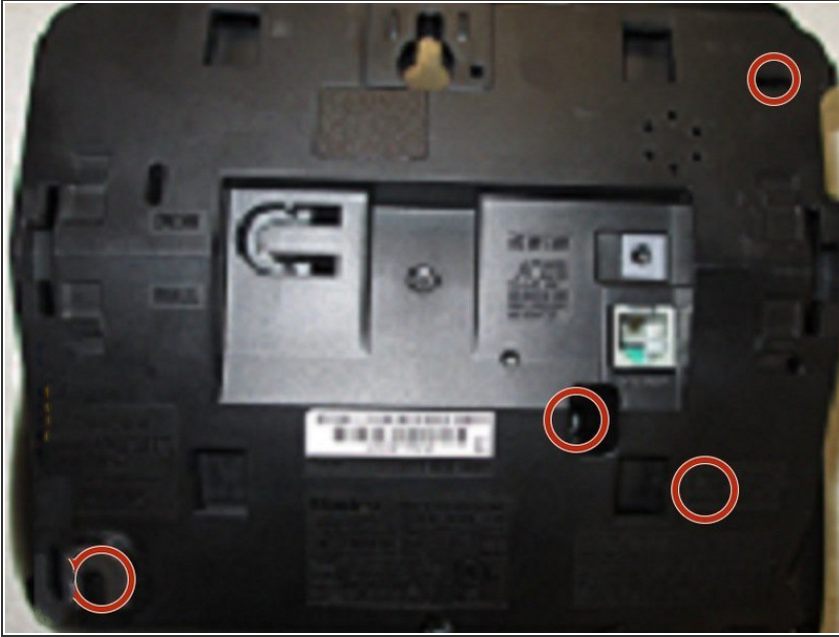

- Unplug the phone from the base by detaching the RJ-11 plug.
- Flip the base upside down, and use the Phillips #01 screwdriver to unscrew the seven screws (Head size: 5.11mm, length: 8.6mm) on the underside of the base.

Step 2

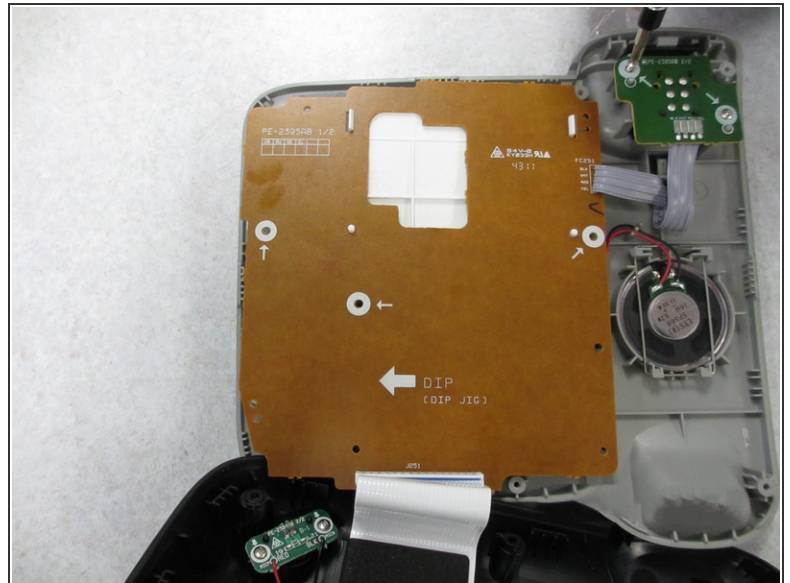

- Using the spudger, separate the top shell of the base from the bottom shell from the base.
- ⚠ Use care when separating the base so the ribbon cable between the top shell circuit board and the bottom shell circuit board is not damaged!
- Lift the top shell off the bottom, and you have successfully opened the phone base.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 09:06:34 AM.